

04-03-00

A

03/30/00  
JC784 US  
PTO

BOX PATENT APPLICATION  
THE COMMISSIONER OF PATENTS AND TRADEMARKS  
Washington, D.C. 20231

Express Mail No. EL247019889US  
Attorney Docket No. 99-245

Transmitted herewith for filing is the patent application of:  
Inventor : Daniel Watkins  
For : AUDIO/VISUAL DEVICE FOR CAPTURING, SEARCHING AND/OR DISPLAYING AUDIO/VISUAL MATERIAL

Enclosed are:


- ☒ Specification, Claims and Abstract.
- ☒ 8 Sheets of Drawings.
- ☒ Combined Declaration and Power of Attorney (signed).
- ☒ Assignment and Recordation Form Cover Sheet.
- ☒ Check in the amount of \$1,504.00 (\$1,464.00 for the filing fee; \$40.00 for the assignment recording fee).

The filing fee has been calculated as shown below:

			SMALL ENTITY		OTHER THAN A SMALL ENTITY	
	(Col. 1)	(Col. 2)				
FOR:	NO. FILED	NO. EXTRA	RATE	FEE	OR	RATE FEE
BASIC FEE	//////////	//////////	////	\$345	OR	//// \$690
TOTAL CLAIMS	* 50 - 20 =	* 30	X 9 =	\$	OR	X 18 = \$540
INDEP CLAIMS	* 6 - 3 =	* 3	x 39 =	\$	OR	x 78 = \$234
MULTIPLE DEPENDENT CLAIM PRESENTED			+130 =	\$	OR	+260 = \$
*If the difference in Col. 1 is less than zero, enter "0" in Col. 2			TOTAL \$		OR	TOTAL \$1,464.00

- ☐ Please charge my Deposit Account No. \_\_\_\_\_ in the amount of \$ \_\_\_\_\_. A duplicate of this sheet is attached.
- ☒ A check in the amount of \$1,504.00 is enclosed (\$1,464.00 for filing fee; \$40.00 for assignment recording fee).
- ☒ The Commissioner is hereby authorized to charge payment of the following fees associated with this communication or credit any overpayment to Deposit Account No. 12-1087. A duplicate copy of this sheet is enclosed.
  - ☒ Any patent application processing fees under 37 C.F.R. 1.17.
  - ☐ The issue fee set in 37 C.F.R. 1.18 at or before mailing of the Notice of Allowance, pursuant to 37 C.F.R. 1.311(b).
  - ☒ Any filing fees under 37 C.F.R. 1.16 for presentation of extra claim.

Dated at Englewood, Colorado, this 30<sup>th</sup> day of March, 2000.

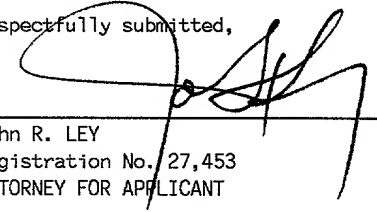Respectfully submitted,  
  
\_\_\_\_\_  
John R. LEY  
Registration No. 27,453  
ATTORNEY FOR APPLICANT

JOHN R. LEY, LLC  
5299 DTC Boulevard, Suite 610  
Englewood, Colorado 80111-3327  
Telephone: (303) 740-9000  
Facsimile: (303) 740-9042

Jc511 U.S. PTO  
09/539686  
03/30/00



AUDIO/VISUAL DEVICE FOR CAPTURING, SEARCHING  
AND/OR DISPLAYING AUDIO/VISUAL MATERIAL

Field of the Invention

This invention relates to presentation of audio/visual (A/V) material that  
5 preferably includes close captioning (CC) and preferably is from multiple sources,  
such as broadcast television (TV) programming, digital versatile disks (DVD)  
programming and World Wide Web broadcast programming. More particularly, the  
present invention relates to scanning, capturing, storing, searching and displaying  
the content of the CC and A/V material from the multiple sources to assist a user in  
10 finding desired programming or information. An A/V device, according to the  
present invention, processes the CC and A/V material from multiple sources  
simultaneously and presents the processed results or the A/V material on a  
conventional TV or higher resolution progressive monitor.

Background of the Invention

15 In conventional techniques for a user to find desired A/V content for viewing  
on a television (TV), the user either reads a program guide or "channel surfs." The  
program guide provides a very short description of the A/V content that may not be  
sufficient for the user to determine whether the A/V content is desired or not.  
Through "channel surfing," the user manually skims through all available A/V  
20 content by switching from one A/V channel to the next with a handheld remote  
control device until a desired program is found. This process is slow and time-  
consuming and can miss some desired programs if the A/V channel is currently  
showing a commercial. To record desired programming while the user is away from  
the TV for later viewing, the user must know the exact channel and time period of  
25 the program, so the user must use the program guide to find the desired program,  
since the user cannot "channel surf" while away from the TV. However, the user  
can easily miss recording desired programs if they are not adequately described in  
the program guide or if programming is delayed on the given A/V channel. Another

limitation of program guides is that some are regional in nature, providing only local information for A/V channels available through local broadcasts or local cable companies. However, with the use of satellite receivers and World Wide Web based programs, users can receive A/V channels that are not included in local program guides, so some desired programs available through these channels can be easily missed.

Close captioning (CC) has been required to be included in broadcast television (TV) programs in the United States since the 1980's. CC is also included in audio/visual (A/V) content provided on digital versatile disks (DVD), also known as digital video disks. Generally, CC is the readable text of words being spoken in the broadcast program, presented simultaneously on the TV screen with the A/V content. Thus, the CC content usually contains the entire verbal content of the broadcast program in textual format. Typically, the CC content is provided for the benefit of people who are hearing-impaired, for whom the audio content of the broadcast program is of no or limited use. Thus, the CC content is generally received, decoded, displayed and discarded. No further use is made of the CC content.

The CC content provides two bytes at a time within the regular broadcast signal during the horizontal blanking interval of an A/V frame, when no A/V content is being sent. At the standard 30 frames per second for broadcast TV in the United States, therefore, 60 bytes of CC content can be received each second. This rate is relatively slow compared to the processing speed of modern digital circuitry, which is capable of processing digital information at a considerably faster rate. The rate at which CC content is received, however, is fast enough to provide text at a rate that most people can read, which is the primary concern for CC.

With respect to DVD, the DVD standards provide for eight tracks of textual sub-titles, which can be used for providing translations of the words spoken in the DVD content into different languages, but can also be used for typical CC. Again, since the textual content does not need to be provided at a rate faster than most people can read, the sub-title or CC content is provided at a relatively slow rate.

Also, the sub-title and CC content is read, decoded, displayed and discarded, as mentioned above.

The DVD content is played by a DVD player, or computer with an installed DVD drive and DVD decoder card. A DVD player or computer is typically under the control of a general purpose host processor with firmware and software that controls the hardware for reading, decoding and displaying the DVD content.

The DVD player typically displays the DVD content on a standard TV. Standard TVs are interlaced monitors that display 60 fields per second (30 frames per second) of video. Standard TVs include those that receive a composite video signal that has 300 horizontal lines of resolution, an S-Video standard signal that has 400 horizontal lines of resolution, and an RGB (Red, Green, Blue) component video standard signal that has 476 horizontal lines of resolution. The computer, on the other hand, typically displays the DVD content on a progressive monitor. Progressive monitors are noninterlaced monitors that display 60 frames per second. Progressive monitors that are currently available have higher resolutions than the TVs. Such resolutions typically range from 800x600 (i.e. 800 horizontal x 600 vertical pixels) to 1280x1024 and higher.

With the higher resolution, the progressive monitors provide a clearer and sharper image than do the standard TVs. Higher resolution and clearer images are particularly beneficial for displaying textual content, such as the CC or sub-title content, since the lettering is sharper and, therefore, easier to read with less eye strain. Viewing DVD content or broadcast programs on a progressive monitor, however, requires that the user also purchase a computer with the installed DVD equipment and/or TV tuner card. Such expense is typically not justified for simply viewing A/V content. Additionally, progressive monitors for computers typically have a much smaller viewing screen than do standard TVs, with 14 to 17 inches being most common for progressive monitors, but 20 to 35 inches being common for standard TVs. However, prices for progressive monitors continue to decrease, while screen sizes increase.

It is with respect to these and other background considerations that the present invention has evolved.

#### Summary of the Invention

An audio/visual (A/V) device finds and provides desired A/V content  
5 containing close captioning (CC). The A/V content is received from a variety of  
sources or A/V channels, including ordinary broadcast programming channels  
transmitted over airwaves, satellite or cable, DVD content provided on a DVD disk,  
broadcast programming communicated over the Internet or World Wide Web (the  
web), or any combination thereof. With user interaction, the A/V device  
10 automatically finds desired A/V content from the available sources, primarily by  
capturing and searching the CC content. The A/V device automatically scans A/V  
content and searches for the desired A/V content according to search criteria  
specified by the user. Searches are primarily performed on the CC content using  
text-based criteria, thereby making greater use of the CC content than is done by  
15 merely displaying and discarding the CC content. However, searches for audio-  
based criteria are also performed on an audio track of the A/V material.

After the CC content is detected, captured and stored, it is searched for  
certain criteria, such as key words. When the CC content is processed and  
discarded in a steady stream without storing it, it is possible to search only for  
20 single words or criteria. However, since the CC content is stored in the present  
invention, it can be manipulated in much more complex searching techniques, such  
as complex groupings of words processed by complex search algorithms. Upon  
matching the search criteria, a proper response is generated. For example, the  
user may be prompted with an audible or visible signal and/or part or all of the A/V  
25 content may be stored. The stored part of the A/V content will typically include text  
from the CC content, portions of the audio track and/or portions of the video  
content, such as video stills or pictures, which the user can view or inspect.

Preferably, the present invention incorporates a DVD player that receives  
broadcast programming and captures the CC content from the broadcast  
30 programming. The A/V content and CC content are preferably played back on a

progressive monitor, instead of a standard TV. In this manner, the user's ability to enjoy reading the text and viewing the higher resolution images is enhanced, since the text and images are clearer and sharper with the resolution capabilities of current progressive monitors, but without significantly increasing the cost of the A/V device for performing the playback.

Capturing and storing the CC content achieves several improvements. Since the CC content is received at a relatively slow rate for one TV or DVD channel, the CC content of several channels may be simultaneously scanned and stored in realtime. Thus, the user's search criteria can be applied to the CC content of several channels for a more thorough search. Upon a match, the user is alerted, recording a transcript is started, switching to the channel with the matched CC content is performed automatically (either immediately or after a programmed delay that allows the user to view the text first), or the text that was received before and after the matched text is displayed for viewing. Additionally, the user can view the CC contents for multiple channels simultaneously to manually scan or search the CC content. Furthermore, stored CC content can be played back at any rate which suits the user's reading and comprehension speed. Also, the text extracted from the CC content can be stored and indexed in a variety of ways to assist or enable different types of searches for any desired criteria, such as words, phrases, time stamps, originating source, etc.

Audio content is processed by converting the received analog signal into a digital pulse code modulated (PCM) signal at a predetermined sample rate and bit rate. The PCM signals are captured and stored to enable monitoring for certain criteria (e.g. a close match to a predetermined audio clip, changes in the average signal amplitude which may indicate a change in the broadcast program, etc.).

In addition to capturing textual and audio content, video stills or pictures are optionally captured and stored when the text or audio searches find a match. In this manner, the user can later see what was in the video content at the time of the match in either the textual or audio content. The user can use this information to further determine whether the A/V content was something that the user desired to

view. Additionally, the captured stills can be compared to stored images to find close matches, thereby automatically searching the video content, as well as textual and audio content.

These and other improvements are achieved in an A/V device for receiving A/V content via transmitted A/V signals from one or more A/V channels (e.g. broadcast TV, a DVD device and/or a web site). One or more channel receivers (e.g. a TV tuner, a DVD decoder and/or a web browser) selectively receive the transmitted A/V signals from the respective A/V channels and convert the transmitted A/V signals into digital A/V signals, if not already in a digital format. A video display circuit receives a video portion of the digital A/V signals from a selected one of the channel receivers and converts the video portion into a display signal and outputs the display signal. A content capture unit receives a portion of the digital A/V signals, captures part of the digital A/V signals and outputs the captured part of the digital A/V signals. The content capture unit comprises either a CC data slicer that extracts CC content, a digitized audio capturing unit that filters audio content, a video still image capture unit that filters still images of the video content or a combination thereof. A captured content storage unit, such as a memory device, receives the captured part of the digital A/V signals from the content capture unit and stores the captured part in memory.

It is preferable that the CC data slicer receives a video portion of the digital A/V signal and extracts and captures a CC content part of the video portion, the digitized audio capturing unit receives an audio portion of the digital A/V signal and captures a part of the audio portion, and the video still image capture unit receives the video portion of the digital A/V signal and captures a video still image part of the video portion. Additionally, the channel receivers preferably scan through a plurality of selected channels and send at least a portion of the digital A/V signals for each selected channel to the content capture unit to capture part of the digital A/V signals for each selected channel. Additionally, it is preferable that a search engine receives and searches through the captured part of the digital A/V signals for each selected channel to locate a match with user search criteria. The user



search criteria is preferably one or more of: a textual criteria related to the CC content, audio criteria related to the audio portion, and video criteria related to the video still image.

Response instructions are preferably to be followed upon the location of a search match. The response instructions are preferably to provide a visible alert signal, to provide an audible alert signal, to begin displaying the A/V content from the selected channel in which the match was located, to display the CC content part from the selected channel in which the match was located, to capture a video still image by the video still image capture unit from the video portion of the digital A/V signal of the selected channel in which the match was located, to record the A/V content of the selected channel in which the match was located, and/or to record the CC content part of the selected channel in which the match was located.

It is further preferable that the video display circuit also comprises a video output connection for a progressive monitor and a progressive monitor video encoding circuitry. The progressive monitor video encoding circuitry preferably de-interlaces the digital video signal if necessary, scales the video to the pixel resolution of the progressive monitor and converts the digital video signal into an analog signal for display on the progressive monitor.

The previously mentioned and other improvements are also achieved in a method of processing A/V content wherein an A/V signal is received from an A/V channel, a portion of the A/V signal is captured, and the captured portion is stored. The captured portion of the A/V signal includes CC content, audio content and/or a video still image.

Additionally, the method preferably scans through a plurality of A/V channels. Thus, the A/V signal is received from each of the A/V channels, and the captured portion of the A/V signal is captured from each of the A/V channels. The captured portion of the A/V signals from each of the A/V channels is preferably searched to locate a match with user search criteria. The user search criteria is preferably textual criteria related to the CC content, audio criteria related to the audio content and/or video criteria related to the video still image. Upon a match

between search criteria and an A/V channel, an appropriate response is performed, such as providing an alert signal, displaying or recording the A/V content of the matched channel, displaying or recording the CC content of the matched channel and/or capturing a video still image from the matched channel. Additionally, the A/V channels preferably comprise at least one of a DVD source, a broadcast programming source and a web programming site.

Additionally, the method preferably selects video encoding from between a PAL/NTSC video encoder and a progressive monitor video encoder. The progressive monitor video encoder preferably de-interlaces and scales the A/V signal for the screen resolution capabilities of a progressive monitor.

The previously mentioned and other improvements are also achieved in a DVD player that also receives broadcast TV programming. The DVD player includes a TV tuner as well as conventional DVD circuitry, both of which feed into video encoding circuitry for presentation of A/V content on a display. Thus, the presented A/V content is selected from among multiple broadcast TV programs and installed DVD content.

Additionally, the DVD player preferably further comprises a second broadcast TV tuner. Both TV tuners provide a selected TV program to the video encoding circuitry. The video encoding circuitry selects the presented A/V content from among the two selected TV programs and the DVD content.

The previously mentioned and other improvements are also achieved in a DVD player for playing back a digital video signal on a conventional television or progressive monitor. The DVD player comprises a source of the digital video signal and a video encoding circuit. The video encoding circuit comprises a video encoder, a de-interlacing unit, a video scaler and a video DAC. The video encoding circuit receives the digital video signal and provides the digital video signal to a selected one of either the video encoder or the de-interlacing unit. When the digital video signal is provided to the video encoder, the video encoder encodes the digital video signal into a conventional television signal and provides the conventional television signal to the conventional television. When the digital

video signal is provided to the de-interlacing unit, the de-interlacing unit de-interlaces the digital video signal into a progressive video signal. The video scaler scales the progressive video signal into a scaled video signal. The video DAC converts the scaled video signal into a display signal and provides the display  
5 signal to the progressive monitor.

Additionally, the conventional television signal preferably has a resolution (i.e. horizontal lines of resolution or pixel-by-pixel resolution) that is equal to or less than the original resolution of the digital video signal, whereas the display signal provided to the progressive monitor preferably has a resolution that is equal to or  
10 greater than the original resolution of the digital video signal. It is further preferable that the source of the digital video signal comprises a DVD source and a conventional broadcast television source.

The previously mentioned and other improvements are also achieved in a DVD player for playing back an A/V signal. The DVD player comprises a source of  
15 the A/V signal, at least one content capture unit and a storage unit. The A/V signal includes CC content, audio content and video content. Each content capture unit receives at least a portion of the A/V signal and captures therefrom a part of the A/V signal, such as CC content, audio content and/or a still image from the video content. The storage unit receives the captured part of the A/V signal from each  
20 content capture unit and stores the captured part of the A/V signal in memory.

A more complete appreciation of the present invention and its scope, and the manner in which it achieves the above noted improvements, can be obtained by reference to the following detailed description of presently preferred embodiments of the invention taken in connection with the accompanying drawings, which are  
25 briefly summarized below, and the appended claims.

#### Brief Description of the Drawings

Fig. 1 is a block diagram of a DVD player embodying the present invention, shown connected to input devices, such as a compact disk, antenna, cable, satellite, the World Wide Web (the web), a remote control unit (RCU) and a  
30 keyboard, and output devices, such as speakers and a display.

Fig. 2 is a more detailed block diagram of the DVD player and the input and output devices shown in Fig. 1, but with alternative display devices.

Fig. 3 is block diagram of a host processor, as incorporated in the DVD player shown in Figs. 1 and 2, showing exemplary programs running thereon and audio/visual outputs.

Fig. 4 is an illustration of a typical analog close captioning (CC) signal for processing by the DVD player shown in Figs. 1 and 2.

Fig. 5 is a block diagram of a CC data slicer of the DVD player shown in Fig. 2.

Fig. 6 is a flow chart showing a procedure for setting up and launching functions, including capturing and searching, of the DVD player shown in Figs. 1 and 2.

Fig. 7 is a flow chart showing a procedure implemented by the DVD player shown in Figs. 1 and 2 to scan multiple channels and separate out raw information relating to CC for each channel.

Fig. 8 is a flow chart showing a procedure implemented by the DVD player shown in Figs. 1 and 2 to extract and store CC content from the raw information obtained in executing the procedure shown in Fig. 7.

Fig. 9 is a flow chart showing searching for audio/visual content in the DVD player shown in Figs 1 and 2.

#### Detailed Description

A DVD player or audio/visual (A/V) device 30, which embodies the present invention, is connected to various content source inputs, user input devices and playback output devices attached thereto as shown in Fig. 1. The content source inputs include a compact disk input (CD IN) 32, an antenna 34, a cable 36, a satellite link 38 and the World Wide Web (the web) 40. The DVD player 30 has the standard DVD capabilities as well as additional capabilities to receive and playback A/V content in accord with the present invention. The DVD player 30 receives the A/V content from various A/V channels, including not only a DVD source, but also broadcast television (TV) programming and web broadcast programming. The

DVD player 30 accesses compressed DVD content stored on a DVD disk 48 through a DVD drive 42. The DVD player 30 accesses the broadcast TV programming from the antenna 34, the cable 36 and the satellite link 38 through TV reception circuitry 44. Additionally, the DVD player 30 accesses the web broadcast programming from the web 40 through a web browser 46.

The user input devices include a remote control unit (RCU) 50 and a keyboard 52 for a user to input data to and control the DVD player 30. The playback output devices include one or more speakers 54 for playing back audio content and a display 56 for playing back video content. The display 56 is a standard TV, high definition TV (HDTV), progressive monitor or other suitable display device. Thus, as will be described below, the DVD player 30 provides video signals for controlling, not only standard TVs and HDTVs, but also progressive monitors.

The DVD player 30 includes decoding and processing hardware and software 58 connected to the DVD drive 42, the TV reception circuitry 44 and the web browser 46 to receive close captioning (CC) content, audio content and video content from the A/V channels. The decoding and processing hardware and software 58 receives, captures, stores and processes the CC content, from each of the A/V channels that provides CC content, to assist the user in finding desired programming. The decoding and processing hardware and software 58 also processes portions of the audio content and the video content received through each of the A/V channels to further assist the user in finding desired programming.

The RCU 50 is preferably an infrared handheld device with various navigation and command buttons (not shown) for the user to press to interact with the DVD player 30. The keyboard 52 is preferably a wireless infrared keyboard with at least the standard alphanumeric keys, but also special function keys as are appropriate. The buttons and keys of the RCU 50 and keyboard 52 may be combined into a single user input keyboard/RCU.

The compact disk input 32 provides compact disk audio content for playback through the DVD player 30. The antenna 34, cable 36, satellite link 38 and the web

40 provide broadcast programming, such as standard broadcast TV programming, or video-on-demand for playback through the DVD player 30.

A more detailed block diagram of the DVD player 30 (Fig. 1) is shown in Fig. 2. The content source inputs include not only the CD input 32, the antenna 34, the cable 36 and the satellite link 38 as shown in Fig. 1, but also a communication link 60, such as a telephone line or network cable, for connecting to the web 40 (Fig. 1).

A standard TV 62 and a progressive monitor 64 are shown in place of the generic display 56 (Fig. 1), since separate pathways are provided for the video output signals to each type of display 56 (TV 62 and progressive monitor 64). Typically, the TV 62 is an interlaced monitor that displays 60 interlaced video fields per second (30 frames per second). The TV 62 is a conventional TV or HDTV that receives a standard composite video signal that typically has 300, 400 or 476 horizontal lines of resolution. The progressive monitor 64 is the type of noninterlaced display that is typically used with a computer, or PC, and includes the standard pixel resolutions available for Video Graphics Adapter (VGA), Super VGA (SVGA) and other appropriate PC monitors. Such pixel resolutions for progressive monitors are greater than those for TVs and HDTVs and are currently common up to 1280x1024 pixels. Succeeding generations of progressive monitor products continue to have greater pixel resolutions available. Additionally, such a progressive monitor 64 displays 60 noninterlaced frames per second, or twice the display rate of the typical TV 62. With the higher resolutions and faster display rates of the progressive monitors, clearer and sharper images may be displayed on the progressive monitor 64 than on the TV 62.

Generally, the TV reception circuitry 44 shown in Fig. 1 corresponds to TV tuners 66 and 68, video analog-to-digital converters (ADCs) 70 and 72 and audio ADCs 74 and 76. Also, the web browser 46 shown in Fig. 1 generally corresponds to a communication interface 78 (such as a modem or network interface card) and a web browser program 80 (Fig. 3) running on a host processor 82.



can input commands and data with the keyboard 52 through a keyboard interface 106 which is connected to the host bus 96 to send user keyboard input to the host processor 82 under the control of a keyboard control program 107.

5 The host memory RAM 86 generally comprises memory for storing information and connects to the host bus 96 to exchange the information with the host processor 82. The host memory RAM 86 provides storage for the programs 97 and data being run or operated upon by the host processor 82.

10 The DVD disk 48 contains the DVD content to be played back on the TV 62 or monitor 64. The DVD drive 42 reads a DVD-encoded bitstream for the DVD content from the DVD disk 48 and sends the DVD-encoded bitstream to the DVD drive interface 88. In the optional case that the DVD disk 48 and DVD drive 42 support a re-writable DVD disk 48, the DVD drive 42 receives encoded DVD content from an A/V encoder 108 through a multiplexer and track buffer 110 and stores the encoded DVD content on the DVD disk 48.

15 The DVD drive interface 88 receives the DVD-encoded bitstream from the DVD drive 42 and de-multiplexes and stores the DVD-encoded bitstream in a de-multiplexer and track buffer 112 prior to sending the DVD-encoded bitstream to the DVD decoder 90. The DVD drive interface 88 connects to the DVD decoder 90, not only for sending the DVD-encoded bitstream to the DVD decoder 90, but also for  
20 exchanging control signals therewith. The DVD drive interface 88 also connects to the host bus 96 for sending and receiving control and status signals to/from the host processor 82.

The DVD decoder 90, such as the L64020 or L64021 DVD decoders available from LSI Logic, Inc., receives the DVD-encoded bitstream from the DVD  
25 drive interface 88 and separates, decompresses and/or decodes the DVD-encoded bitstream into the various types of conventional DVD content, such as textual data, programming data, digital video content and digital audio content. The DVD standards provide for a pixel resolution for A/V content up to 720x480 pixels (720 horizontal lines of resolution) with a display rate of 60 interlaced video fields per  
30 second (30 frames per second). The DVD decoder 90 is attached to the host bus



96 for communication with and control by the host processor 82. A decoder memory RAM 114 is connected to the DVD decoder 90 to support the functioning of the DVD decoder 90.

The audio DAC 94 receives the decoded digital audio content, typically a streaming pulse code modulated (PCM) signal, from the DVD decoder 90 and converts the PCM signal into an analog signal that can be played on the speakers 54. The audio DAC 94 connects to the host bus 96 to exchange control and initialization signals with the host processor 82 to enable proper handling of the decoded digital audio content.

The video encoder 92 receives the decoded digital video content from the DVD decoder 90 and encodes it for display in either the National Television Systems Committee (NTSC) composite color-encoding system typically used in the United States or the Phase Alternate Line (PAL) composite color-encoding system typically used in Europe. For either of these composite color-encoding systems, the video encoder 92 must reduce the pixel resolution from the DVD standard 720 horizontal lines of resolution to 300, 400 or 476 horizontal lines of resolution, depending on whether the TV 62 supports the standard composite video signal that has 300 horizontal lines of resolution, the S-Video standard signal that has 400 horizontal lines of resolution, or the RGB (Red, Green, Blue) component video standard signal that has 476 horizontal lines of resolution, respectively.

To utilize the full resolution capabilities of DVD content, rather than reducing the resolution of the DVD content to fit the capabilities of the TV 62, the DVD player 30 incorporates a second video encoding circuitry, including a de-interlacing unit 116, a video scaler 118 and a video DAC 120, to playback the DVD content on the progressive monitor 64. The de-interlacing unit 116, the video scaler 118 and the video DAC 120 connect to the host bus 96 to exchange control and programming signals with the host processor 82, so that the correct video signal will be provided to the monitor 64. The de-interlacing unit 116, the video scaler 118 and the video DAC 120 are, thus, programmed with the pixel resolution of the original interlaced digital video signal and/or the pixel resolution of the progressive monitor 64, so that

the original interlaced digital video signal can be converted to the proper signals for playback on the progressive monitor 64.

The de-interlacing unit 116 receives the original interlaced digital video signal through a multiplexer (MUX) 122 from either the DVD decoder 90 or a CC data slicer 124 (described below). The multiplexer 122 operates under the control of the host processor 82 to select the source (the DVD decoder 90 or CC data slicer 124 or a blended combination thereof) for the original interlaced digital video signal to be provided to the de-interlacing unit 116.

The de-interlacing unit 116 converts the original interlaced digital video signal (interlaced 60-fields-per-second) to a progressive 60-frames-per-second video signal and provides the progressive video signal to the video scaler 118. The video scaler 118 scales the pixel resolution of the progressive video signal (i.e. the same pixel resolution of the original interlaced digital video signal) to the pixel resolution of the progressive monitor 64 by trimming, stretching and linear interpolation. The scaled progressive video signal is provided by the video scaler 118 through another multiplexer 126 to the video DAC 120. The video DAC 120 converts the scaled progressive video signal from a digital signal to an analog signal, which can be played back on the progressive monitor 64. In this manner, the full resolution capability of DVD content is preserved and presented on the progressive monitor 64 for the user's enjoyment.

Additionally, since some currently available video DACs 120 are capable of handling the RGB component video standard signal from the video encoder 92, the RGB signal may be routed through path 128 and the multiplexer 126 to the video DAC 120 and then to an RGB connector (not shown) on the TV 62. The multiplexer 126 operates under the control of the host processor 82 to select which of the RGB signal or the scaled progressive video signal to send to the video DAC 120.

In addition to the DVD content, the video content from the other A/V channels that provide video content (the antenna 34, the cable 36, the satellite link 38 and the web 40, Fig. 1) can be played back with the progressive monitor 64.

The antenna 34, cable 36 and satellite link 38 feed broadcast signals into the two

TV tuners 66 and 68. With two TV tuners 66 and 68, the DVD player 30 can process two broadcast signals simultaneously. The TV tuners 66 and 68 connect to the host bus 96 to exchange control and programming instructions with the host processor 82 under the control of a tuner control program 130 (Fig. 3). The TV  
5 tuners 66 and 68 separate out analog video and audio signals from the broadcast signal and provide the analog video signals to video ADCs 70 and 72, respectively, and provide the analog audio signals to audio ADCs 74 and 76, respectively. The video ADCs 70 and 72 and the audio ADCs 74 and 76 convert the analog video and audio signals into digital video and audio signals, which can be processed by  
10 the digital components of the DVD player 30. The digital audio signal is typically a stream of PCM signals, as is the decoded digital audio content provided by the DVD decoder 90, as described above.

Web broadcast programming originating from the web 40 (Fig. 1) is "streamed" across the communication link 60 and received by the communication  
15 interface 78. The web broadcast programming is provided in a digital format. In fact, there are currently several streaming video and audio formats available for sending digital A/V content over the web 40. The incoming digital A/V content is sent by the communication interface 78 through the host bus 96 to the host processor 82. The web browser program 80 running on the host processor 82,  
20 sometimes with the aid of a web "plug-in" program (not shown), performs necessary decoding and/or decompressing of the digital A/V content to form digital video and audio signals which can be processed by the DVD player 30. The digital audio signal is typically a stream of PCM signals, as is the decoded digital audio content provided by the DVD decoder 90, as described above. The digital video signal is  
25 provided at a digital video output 132 of the host processor 82, and the digital audio signal is provided at a digital audio output 134 of the host processor 82. Alternatively, the host processor 82 could output the digital video and audio signals to the host bus 96, which is connected to the CC data slicer 124 and a digitized audio processing unit 140 to send the digital video and audio signals thereto as  
30 described below.



preparation for sending it to the DVD drive 42 for storage on the re-writable DVD disk 48. Alternatively, if re-writability is not available for the DVD disk 48, then the A/V content can be recorded on an analog video tape recorder (not shown) that intercepts the analog signals sent to the TV 62, progressive monitor 64 and speakers 54.

5 The CC data slicer 124 extracts the CC content from the digital video signal of the broadcast programming before passing the digital video signal to the de-interlacing unit 116. The CC data slicer 124 is connected to the host bus 96 to exchange control and programming signals with the host processor 82 under control of a CC and sub-title processing program 170 (Fig. 3). Alternatively, the CC data slicer 124 may be connected to the DVD decoder 90 to receive control signals, and the DVD decoder 90 may be programmed by the host processor 82 under the control of the CC and sub-title processing program 170 by placing control data in host registers 172 within the DVD decoder 90 instructing the DVD decoder 15 90 on how to control the CC data slicer 124. The CC data slicer 124 also sends extracted CC content through the host bus 96 to a processing memory RAM 174 for storage. Alternatively, the processing memory RAM 174 may be part of the host memory RAM 86. For the CC data slicer 124 to capture CC content from more than one broadcast program, the TV tuners 66 and 68 are programmed to scan through several channels (e.g. 30 channels) by sequentially tuning to each channel and 20 sending video content for each channel to the CC data slicer 124, wherein the CC content for each channel is extracted and sent to the processing memory RAM 174 for storage. Channel scanning for CC content also permits simultaneous display of the CC content from multiple channels on the display 56 (Fig. 1). The CC content is displayed horizontally or vertically (e.g. for Chinese or Japanese characters) on 25 any area of the display 56. Since the CC content and video content are stored in the processing memory RAM 174, the video frames can be repeated, with text scrolling updated by the host processor 82. "Thumbnail" still images can be displayed underlaying the multiple channels' CC content if desired.



program 182 (Fig. 3). The capture and filter unit 180 captures a single frame, or still image, of the video content on a programmed time and/or type of text match. The capture and filter unit 180 stores the captured still in the processing memory RAM 174 along with stored CC and audio content. To save space in the

5 processing memory RAM 174, the capture and filter unit 180 preferably filters the captured stills to a smaller size, such as a 1/4 SIF (Source Input Format) file, common in some video compression techniques. Alternatively, the host processor 82 could filter the captured stills with software programming. Thus, the capture and filter unit 180 connects to the host bus 96 to exchange control and programming

10 signals with the host processor 82 and to send the captured stills to the processing memory RAM 174.

A flow chart for an exemplary procedure for setting up and launching channel scanning and searching by a setup and launch program 184 (Fig. 3) running on the host processor 82 is shown in Fig. 6. The procedure starts at step

15 186. At step 188, the user is prompted with a menu screen (not shown) to select the channels to be scanned. The channels may be broadcast programming from the antenna 34, cable 36 or satellite link 38 (Fig. 2) or web broadcast programming from the web 40 (Fig. 1) or DVD content from the DVD disk 48 (Fig. 2) or a combination thereof. The user may select a range of channels (e.g. channels 2

20 through 45) or particular channels (e.g. channels 2, 5, 14-27, and web site [www.webcastprograms.com](http://www.webcastprograms.com) (a fictional web address)).

At step 190, the user is prompted to select whether the CC, audio and/or video stills of the channels are to be searched while scanning or merely stored in the processing memory RAM 174 (Fig. 2) for later use. If automatic searching is

25 not to be done at this time, then at step 192, the user is prompted to select whether to simultaneously display the text of the CC content for each of the selected channels, so that the user can manually search for desired programming by reading the CC content. The user may also select the formatting and font of the CC content to be displayed. If the user does not want to manually search the CC

30 content, then background scanning is enabled, so the user can view other available

programming under the control of a view A/V selection program 193 (Fig. 3), which permits the A/V content of a selected channel to pass through the DVD player 30 to the TV 62 or progressive monitor 64 while the DVD player 30 (Fig. 2) scans and stores or otherwise processes the CC and/or A/V content of the channels selected in step 188. Additionally, background scanning and storage of the CC content for one or more channels permits the user to access the CC content later, either to perform many different searches for different criteria within the stored CC content of several channels or to manually view the CC content of a single channel at any desired pace at which the user can comfortably read the CC content. Typically, automatic searching performed during real-time scanning of the CC content is performed in the background, so the user can view other available programming under the control of the view A/V selection program 193 while the DVD player 30 performs the automatic scanning, storing and searching. Then the procedure proceeds to step 194 to continue setting up the hardware and software of the DVD player 30 (Fig. 2) for scanning and storing.

If searching is to be performed at this time, however, (i.e. the determination at step 190 is positive) then the user is prompted to enter search criteria for CC content (text), audio content and/or video stills at step 196. Common text search techniques are applied to the CC content to search for keywords, key phrases or groups of words in natural language or boolean searches selected by the user at step 196. Since the CC content is received over time, the search techniques may search for matches within a time interval, such as a group of words that occur within the same one-minute time period. Thus, the text searching may be applied to the CC content of an entire program or to only the CC content received in the latest time interval to find the user's desired programming.

For audio content searching, the user enters audio criteria at step 196 for the DVD player 30 (Fig. 2) to search for distinct changes in the audio content or for matches to predetermined audio segments. Changes in the audio content may be indicated by a sudden change in the base average amplitude of the audio content, so that the base average amplitude of the most recent two or three seconds of



audio content shows a definite difference when compared to the base average amplitude of the most recent one minute. For example, background "white noise" due to spectators at a sporting event may cause the base average amplitude of the audio content to be greater than it would be without the background white noise.

5 This noise is stored and used as a reference. Thus, when a sporting event program switches to a commercial, in which there is no background white noise, there is a detectable change in the base average amplitude, and the DVD player 30 (Fig. 2) may be programmed for a particular response, such as a pause in recording the program. Likewise, when the white noise returns as compared to the  
10 stored reference noise, the DVD player 30 may respond by restarting the recording of the program. In this manner, program changes can be detected, and the DVD player 30 can respond appropriately. With respect to matches to predetermined audio segments, the DVD player 30 compares the latest segment of a broadcast program with the predetermined segment to find a match, or a match within a  
15 predetermined tolerance. Algorithms for such comparisons are conventional and typically determine either a signal-to-noise ratio (SNR) or mean square error (MSE) between the PCM signals of the two audio segments. Thus, the DVD player 30 can search for programming that contains or is preceded by a known audio signal, such as a tone or a few bars of a theme song or the white noise of spectators at a  
20 sporting event. At step 196, the user can upload the predetermined audio segment to the DVD player 30, or the user can record the predetermined audio segment from a previous playing of the desired program and store the segment in the DVD player 30, or the user can select a pre-installed audio segment that was installed in the DVD player 30 by the manufacturer.

25 For video still searching, the user programs the DVD player 30 (Fig. 2) at step 196 to capture (by the capture and filter unit 180, Fig. 2) and store (in the processing memory RAM 174, Fig. 2) still images from video content upon a direction to do so, such as a response to a match in a search of CC or audio content. The DVD player 30 then compares the captured still image with a  
30 predetermined image for a match, or a match within a predetermined tolerance.

For example, for certain types of sporting events, the captured still image may be compared to a green image to find sporting events played on a grass or grass-like field. Thus, the user can instruct the DVD player 30 at step 196 to search for the white noise that may indicate spectators at a sporting event, and, upon a match, further search for a green field to better limit the overall search results. Algorithms for such comparisons are conventional and, again, typically determine either an SNR or MSE between the images.

At step 198, the user is prompted to enter programmed response instructions for the DVD player 30 (Fig. 2) to take under the control of a match response program 200 (Fig. 3) running on the host processor 82 (Fig. 2) upon finding a match in the search criteria specified in step 196. The user may specify that the DVD player 30 is to stop further scanning and to alert the user by switching immediately, under control of the view A/V selection program 193 (Fig. 3), to displaying on the TV 62 or progressive monitor 64 (Fig. 2) the video content of the channel that generated the match. Alternatively, the user may select to be alerted by a presentation of the CC content of the matched channel or by a simple audible or visible signal or by a presentation of the CC content followed by a switch to the matched channel after a delay sufficient for the user to read the CC content that generated the match.

Additionally, the DVD player 30 may automatically start recording a transcript of the CC content of the matched channel under control of a record text program 202 (Fig. 3) running on the host processor 82 (Fig. 2), which stores the CC content of the matched channel in a portion of either the processing memory RAM 174 or the host memory RAM 86 (Fig. 2). The user may specify selective saving of the CC content, wherein a portion of the CC content is stored, such as a predetermined number of minutes or words before or after the point of a search match. Selective saving may also exclude certain portions of CC content known not to be of interest to the user, such as names of products, which may indicate the presence of a commercial within the CC content. Filtering out product names in a list of products may remove many undesired commercials from the stored CC

content. Search matches can also be indexed according to the time of occurrence, the number of times that the same match occurred in the same program and/or the channel in which the match occurred. The order of saved words, phrases and/or sentences can be time lapse based, chronologically based, web search engine based and/or real-time clock based.

Also, the DVD player 30 may automatically start recording the A/V content of the matched channel under control of a record A/V program 204 (Fig. 3) running on the host processor 82 (Fig. 2), which controls either of the TV tuners 66 or 68 (Fig. 2) or the web browser 46 (Fig. 1) as well as the A/V encoder 108, the multiplexer and track buffer 110 and the DVD drive 42 (Fig. 2) to capture the desired A/V content of the matched channel and store the A/V content to the DVD disk 48 (Fig. 2) if the DVD disk 48 is re-writable.

Another programmed response alternative is to capture, by the capture and filter unit 180 (Fig. 2) under control of the capture still program 182 (Fig. 3), a video still image in the video content, instead of the entire A/V content, at the time of a match in either CC content or audio content. Further responses may be to present the video still image to the user to manually determine whether the search match found a desired program, or to compare the video still image to a predetermined image for a match, as described above.

The programmed response may also rank multiple search matches according to the user's priority for saving, searching or displaying the search matches. Such priority may be entered at step 198 or with the search criteria at step 196 and essentially specifies a preference in search criteria, such as a preference for finding one keyword or phrase or sentence over other specified words or groups of words, or a preference for one channel over other specified channels, or a preference for a video still image having a lower SNR or MSE than other video still images in comparison to a predetermined image, or a preference for a match occurring at a particular time, or a preference for a search result that includes a video still image as opposed to one that does not include a video still image. Thus, the user may specify at step 196 a search for an advertisement for

any film starring a particular actor, but with a preference for a particular film, so that the programmed response displays the results with the particular film listed first, if available, and any other film starring the particular actor listed thereafter.

Additionally, the programmed response may automatically prompt the user or  
5 switch the displayed channel upon any criteria being met, including a particular priority level for a search match.

The above described options for scanning, storing, searching and displaying  
CC content may also be performed on an automatic translation of the CC content  
into a predetermined language. In this option, a translation program 210 (Fig. 3)  
10 running on the host processor 82 (Fig. 2), such as a conventional translation  
program, receives the CC content and translates it into the predetermined  
language for one or more of the scanned channels prior to searching or displaying  
the CC content. Additionally, since the DVD standards provide for up to eight  
tracks of sub-titles for eight languages, another option is for the CC search  
15 capabilities of the DVD player 30 (Fig. 2) to be applied to any of the tracks of sub-  
titles in any available language and to any automatic translation thereof. Further,  
multiple lines of any language's text is presented on the display 56 (Fig. 1).

At step 206, a search engine 208 (Fig. 3) is initialized with the criteria  
specified for searching for CC content (TEXT), audio content (AUDIO) and/or video  
20 still images (STILLS). If searching is to be performed while the DVD player 30 is  
scanning the CC and/or A/V content of any of the channels, then the search engine  
208 monitors the stored CC and/or A/V content for a sufficient quantity of data on  
which to perform the specified searches.

At step 194, the CC data slicer 124 (Fig. 2) is configured with information  
25 related to the channels to be scanned, so the CC data slicer 124 can multiplex  
between the selected channels to extract the CC content. Typically the CC data  
slicer 124 is also configured to store the CC content in the processing memory  
RAM 174 with time and channel indexing, but the CC data slicer 124 is optionally  
configured to store the CC content with any other formatting or indexing as  
30 described above. Further, the CC data slicer 124 is configured with information

related to the channel for which the A/V content is to be passed through to the multiplexer 122 in the event that one of the channels is to be viewed by the user while other channels are being scanned.

At step 212, the digitized audio processing unit 140 (Fig. 2) is configured with information related to the selected channels to be scanned for audio content. The digitized audio processing unit 140 is typically configured with the amount (i.e. number of seconds or minutes) of audio content to maintain for each selected channel, the relative or absolute time of the occurrence of the audio content and the channel on which it occurred.

At step 214, the capture and filter unit 180 (Fig. 2) is configured with information related to the formatting and storage of the video still images to be captured. The capture and filter unit 180 doesn't actually capture the video still images until instructed to do so by the capture still program 182 (Fig. 3) running on the host processor 82 (Fig. 2). The capture still program 182 also instructs the CC data slicer 124 to route the relevant video content to the capture and filter unit 180, so the capture and filter unit 180 can capture the video still image from the video content.

At step 216, the processing memory RAM 174 (Fig. 2) is configured with information to set aside portions of memory space for the CC and/or A/V content which will be stored therein. Memory space is allocated for each channel to be scanned. Memory space for storing search results is allocated in either the processing memory RAM 174 or the host memory RAM 86 (Fig. 2).

At step 218, the TV tuners 66 and 68 (Fig. 2), the web browser 46 (Fig. 1) and/or the DVD decoder 90 (Fig. 2) are configured with information related to the channels to be scanned. The TV tuners 66 and 68 are configured with information related to the selected channels, so the TV tuners 66 and 68 can sequence through the selected channels under the control of the tuner control program 130 (Fig. 3) running on the host processor 82 (Fig. 2). In this manner, the TV tuners 66 and 68 provide CC and A/V content for each channel to the CC data slicer 124 (Fig. 2) and the digitized audio processing unit 140 (Fig. 2). The web browser 46 is configured

with information related to selected web sites or A/V content available via the web, so the web browser program 80 (Fig. 3) can to issue web access requests to selected channels, or web sites, to provide A/V content for scanning and searching. The DVD decoder 90 is configured with information related to a DVD title to be played back from the DVD disk 48 (Fig. 2), so the DVD decoder 90 can provide the DVD content on the installed DVD disk 48 for scanning and searching. Alternatively, one of the TV tuners 66 or 68, the web browser program 80 or the DVD decoder 90 is configured to provide the full A/V content of at least one of the available channels for viewing on the TV 62 or progressive monitor 64 (Fig. 2), while the other available channels are scanned.

At step 220, the hardware and software of the DVD player 30 (Fig. 2) has been set up, so the scanning of the selected channels begins. In other words, the TV tuners 66 and 68, the web browser program 80 and/or the DVD decoder 90 begin sending CC and A/V content for scanning. Thus, the scanning, CC extracting, audio processing, video still image capturing and searching proceed as outlined above with selected responses. The setup and launch procedure ends at step 222.

After launching channel scanning at step 220, the TV tuners 66 and 68 proceed with sequencing through each of the selected TV channels according to an exemplary process shown in Fig. 7. The procedure starts at step 224. At step 226, the TV tuners 66 and 68 tune to the first channel of the selected channels. Typically, the TV tuners 66 and 68 will each be provided with half of the selected channels through which to scan, so at step 226, each TV tuner 66 and 68 will tune to a different channel at which to start scanning.

At step 228, line 21 of the video content (i.e. the line on which the CC content is transmitted) of the current channel is read. At step 230, the data read at step 228 is sent to the CC data slicer 124 (Fig. 2). Step 230 may include some form of arbitration for control of the signal path 136 (Fig. 2). At step 232, it is determined whether the current channel is the last channel in the selected channels. If not, then at step 234, the current channel is incremented to the next

channel in the selected channels, and the procedure branches back to step 228 to perform the above steps 228 and 230 for the next channel. When the TV tuners 66 and 68 have sequenced through all of the channels, i.e. the determination at step 232 is positive, then it is determined at step 236 whether the channel scanning is to stop. If so, then the procedure ends at step 238, but if not, then the current channel is reset at step 240 to the first channel, and the procedure branches back to step 228 to sequence through each of the selected channels again. In this manner, the TV tuners 66 and 68 scan through each of the selected channels and pass the CC signal 144 (Fig. 4) for each channel through the video ADCs 70 and 72 (Fig. 2) to the CC data slicer 124 (Fig. 2) for extraction of the CC content contained in the CC signal 144. A signal for the channel scanning to stop at step 236 may originate automatically within the DVD player 30 (Fig. 2) as a predetermined response to a search match or manually from the user interacting through the RCU 50 or keyboard 52 (Fig. 2).

A flow chart is shown in Fig. 8 for an exemplary procedure to extract the CC content by the CC data slicer 124 (Fig. 2) and store the CC content to the processing memory RAM 174 (Fig. 2) under control of the CC and sub-title processing program 170 (Fig. 3) running on the host processor 82 (Fig. 2). The procedure starts at step 242. At step 244, the CC data slicer 124 (Fig. 2) inputs the channel for the CC content currently available on the signal path 136 (Fig. 2), so the extracted CC content can be correlated with previously extracted CC content for the same channel when storing the CC content to the processing memory RAM 174. To avoid synchronization problems between the TV tuners 66 and 68 (Fig. 2) and the CC data slicer 124, it is preferable to provide data indicating the channel along with the CC content by the TV tuners 66 and 68 across signal path 136. In an alternative, the CC data slicer 124 independently keeps track of the channel by incrementing and resetting the channel in a manner similar to that described in the tuner function procedure shown in Fig. 7.

At step 246, the CC data slicer 124 (Fig. 2) inputs the CC signal 144 (Fig. 4) from the TV tuner 66 or 68 (Fig. 2). At step 248, the CC data slicer 124 extracts

two bytes of CC content from the CC signal 144, as described with respect to Figs. 4 and 5. The CC data slicer 124 stores, at step 250, the two bytes of CC content in the processing memory RAM 174 (Fig. 2) along with time and channel information, or a "time stamp" and "channel stamp," so the search engine 208 (Fig. 3) can

5 perform time and/or channel based searches. At step 252, it is determined whether the channel scanning is to stop, similar to step 236 (Fig. 7) in the tuner function procedure. If not, then the procedure branches back to step 244 to go to the next channel in the selected channels and extract the CC content from that channel. If the determination at step 252 is positive, that the channel scanning is to stop, then

10 the procedure ends at step 254.

A flow chart for an exemplary procedure for performing searching functions by the search engine 208 (Fig. 3) is shown in Fig. 9. The procedure starts at step 256. At step 258, the search engine 208 is set to the first channel in the selected channels for searching. The search criteria was specified by the user at step 196

15 (Fig. 6) of the setup and launch procedure and entered into the search engine 208 when the search engine 208 was initialized at step 206 (Fig. 6) of the setup and launch procedure. The CC content was stored, if desired, in the processing memory RAM 174 (Fig. 2) according to the CC extraction procedure shown in Fig. 8. Likewise, the audio content and video still images were stored, if desired, in the

20 processing memory RAM 174 according to the configuration of the digitized audio processing unit 140 (Fig. 2) and the capture and filter unit 180 (Fig. 2), respectively. Thus, at step 260, the search engine 208 performs an appropriate search algorithm using the entered search criteria and the stored CC and A/V content.

25 At step 262, it is determined whether the search engine 208 generated a match at step 260. If not, then at step 264, it is determined whether the current channel is the last channel in the selected channels for scanning and searching. If not, then the current channel is incremented to the next channel at step 266, and the procedure branches back to step 260 to perform a search on the new current

30 channel. If the determination at step 264 was positive, however, then at step 268,



it is determined whether the searching is to stop. A signal to stop searching may originate from a variety of sources. For example, if the search engine 208 (Fig. 3) has searched the CC and A/V content for the last of the selected channels and no new CC or A/V content has been stored in the processing memory RAM 174 (Fig. 2), then the search engine 208 may stop itself. As another example, the user may enter a stop searching signal through the RCU 50 or keyboard 52 (Fig. 2). If the determination at step 268 is negative, i.e. the searching is not to stop, then at step 270, the current channel is reset to the first channel, and the procedure branches back to step 260 to continue searching through the selected channels again. If the determination at step 268 is positive, however, then the procedure ends at step 272.

If the determination at step 262 was positive, i.e. a match occurred in the search algorithm, then at step 274, it is determined whether the scanning is to stop upon a match. If so, then stop scanning signals are issued at step 276 to stop the TV tuners 66 and 68, the web browser program 80, the DVD decoder 90, the CC data slicer 124, the digitized audio processing unit 140 and the capture and filter unit 180 (Fig. 2) from continuing to scan through the selected channels and from continuing to capture CC and/or A/V content.

At step 278, the programmed response entered by the user at step 198 (Fig. 6) of the setup and launch procedure is performed by the DVD player 30 (Fig. 2) under control of the match response program 200 (Fig. 3). The response may be one or more of any appropriate responses, including those described above. Additionally, the match response program 200 simply saves the search results to the host memory RAM 86 or the processing memory RAM 174 with indexing for matched keywords or groups of words, frequency of match or save within a predetermined time period or single program, and/or an absolute real time occurrence of each match or a time relative to a starting point, such as the beginning of a program. The user can then view the search results at any time.

At step 280, it is determined whether the search engine 208 (Fig. 3) is to stop searching, such as when the programmed response includes stopping at the

first search match, or no further CC or A/V content is being captured and stored, or the user inputs a stop search command from the RCU 50 or keyboard 52 (Fig. 2).

If searching is to stop, then the procedure ends at step 272. If searching is to continue, i.e. the determination at step 280 is negative, then at step 282, it is

5 determined whether the search engine 208 has completed searching the current channel. If not, then the procedure branches back to step 260 to continue performing the search algorithm with the search criteria and the CC and/or A/V content of the current channel, starting where the searching left off at the point of the previous match. If the search engine 208 has completed searching the current  
10 channel, i.e. the determination at step 282 is positive, then the procedure branches back to step 264 to continue to the next channel for searching.

The DVD player 30 (Fig. 2) provides the advantage of scanning multiple channels of CC and A/V content, where the channels include TV broadcast channels, web broadcast programming and/or installed DVD content, to assist a  
15 user in finding desired programming or information. Additionally, DVD subtitles can be treated in the same manner as CC content. The CC and/or A/V content is captured, stored, indexed and searched in a variety of ways to enhance the flexibility with which the user uses it. The user can enter text search criteria for a keyword, group of words or other form of text in the CC content of a set of  
20 channels. The user can also enter audio search criteria for a change in audio playback, indicating a change in programming, or a match between audio playback and a stored audio clip, indicating similar content. The user can also enter video search criteria for comparison to video still images captured upon a match in either text or audio searching. The search criteria can also specify a particular time or  
25 time period within the A/V content at which the matching CC or A/V content must occur. Further, the search criteria can specify one or more channels in which the match must occur.

The DVD player 30 can simply record all of the CC content for each of the selected channels, without or without performing any searches, for a selected time  
30 period, until running out of space in the processing memory RAM 174 for storing

the CC content or until the user inputs a stop-scanning signal. Stored CC content can be searched repeatedly with a variety of search criteria, including, but not limited to, searching for a text string match at a user-specified frequency.

Alternatively, the user can view the stored CC content for any one or more of the selected channels at any speed selected for the user's reading abilities. The user may also view the CC content for one or more selected channels in real-time as the CC content is captured. The format for displayed (or saved) text may be based on the text content or the search criteria. Options to display the text on selected channels per program or per a pre-selected format may be selected. Default display formats are stored in the host memory RAM 86. User-selected options (for each user) for each display format are also stored. Priorities for display formats are queued and recorded in the host memory RAM 86. Additionally, CC content can be translated, and the translation can be searched or presented for the user's viewing.

The DVD player 30 (Fig. 2) can monitor the audio content of a selected channel to calculate a base average amplitude for the audio content over a period of time. A change in the base average amplitude beyond a predetermined threshold for the most recent 2-3 seconds of audio content signifies a possible change in the program, so the DVD player 30 can either stop or start recording the A/V content, as desired, or switch channels to or from the selected channel. The DVD player 30 can also compare the audio content for a selected channel to an audio clip to search for a possible match.

The DVD player 30 (Fig. 2) also permits the user to specify one or more responses which the DVD player 30 is to take upon a match in the search criteria and can prioritize matches and responses. The user can select to be alerted with a visible or audible signal that a match has occurred, so that the user can manually perform the next response. Scanning and/or searching can be stopped upon a match. The DVD player 30 can immediately switch to displaying the channel and program that generated the match or delay the switch long enough to present the CC content that generated the match for the user to view prior to the switch, so that

the user can see whether the match was proper. The DVD player 30 can present the CC content that precedes and/or follows the matching CC content by a predetermined number of words or time period, so that the user can view the context of the matching CC content. The DVD player 30 can start recording a transcript of the CC content of the channel wherein the match occurred and continue to the end of the program. The DVD player 30 can start recording the A/V content of the channel wherein the match occurred. Upon a match in either the CC or audio content, the DVD player 30 can capture a video still image in the video content at about the point of the match and either present the video still image to the user or compare the video still image to a selected image to determine whether there is a match between the two images. The DVD player 30 can also present the CC content along with video still images that correspond to the CC content either at a particular point within the overall A/V content or for the A/V content of an entire program with video still images captured periodically throughout the program.

Furthermore, the CC and A/V content and search information is displayed on either a TV or a progressive monitor. The progressive monitor provides an image clarity not available with conventional TVs. Therefore, the DVD player 30 (Fig. 2) provides enhanced viewing capabilities beyond those available in conventional DVD players.

Presently preferred embodiments of the invention and its improvements have been described with a degree of particularity. This description has been made by way of preferred example. It should be understood that the scope of the present invention is defined by the following claims, and should not be unnecessarily limited by the detailed description of the preferred embodiments set forth above.

The Invention Claimed Is:

1. A device for receiving and playing back audio/visual (A/V) content from one or more sources of transmitted A/V content comprising:

one or more receivers of A/V content each having an A/V input and an A/V signal converter, the A/V inputs selectively receiving transmitted A/V content from the sources, and the A/V signal converters converting the transmitted A/V content into digital A/V signals;

a video display circuit coupled to the receivers and having an input, a video output and a video encoding circuitry, the input receiving a video portion of the digital A/V signals from a selected one of the receivers, the video encoding circuitry converting the video portion into a display signal, and the video output emitting the display signal;

at least one content capture unit coupled to the receivers and comprising a close caption (CC) data slicer that extracts CC content from the A/V content, a digitized audio capturing unit that extracts audio content from the A/V content, or a video still image capture unit that extracts a still image from the A/V content, the content capture unit receiving at least a portion of the digital A/V signals, capturing part of the digital A/V signals and outputting the captured part of the digital A/V signals; and

a captured content storage unit coupled to the content capture unit and comprising memory storage space, the memory storage space receiving and storing the captured part of the digital A/V signals from the content capture unit.

2. A device as defined in claim 1 wherein:

the CC data slicer receives a video portion of the digital A/V signals and extracts and captures a CC content part of the video portion;

the digitized audio capturing unit receives an audio portion of the digital A/V signals and captures a part of the audio portion; and

the video still image capture unit receives the video portion of the digital A/V signals and captures a video still image part of the video portion.



instructions to record the A/V content of the selected channel  
in which the match was located;

- 15 instructions to record the CC content part of the selected  
channel in which the match was located; or  
a combination thereof.

9. A device as defined in claim 3 wherein:

the captured part of the digital A/V signals for each selected source  
comprises CC content; and

the CC content of each selected channel is displayed for viewing.

10. A device as defined in claim 1 wherein the sources of transmitted A/V  
content comprise a DVD source, a broadcast programming source, a web  
programming site, or a combination thereof.

11. A device as defined in claim 10 wherein the receivers further  
comprise a DVD receiver for receiving DVD content from the DVD source, a TV  
tuner for receiving broadcast programming from the broadcast programming  
source, a web browser for receiving web programming from the web programming  
5 site, or a combination thereof.

12. A device as defined in claim 11 wherein the A/V signal converters  
further comprise a DVD decoder within the DVD receiver, a video analog-to-digital  
converter (ADC), an audio ADC connected to the TV tuner, a web browser program  
within the web browser, or a combination thereof.

13. A device as defined in claim 1 wherein the video display circuit further  
comprises:

a second video output connection;

5 a PAL/NTSC video encoder connected to at least one of the channel  
receivers and to the video output connection first aforesaid; and

a progressive monitor video encoding circuitry connected to the  
channel receivers and to the second video output connection.

14. A device as defined in claim 13 wherein the progressive monitor video  
encoding circuitry further comprises:

5 a de-interlacing unit connected to the channel receivers;  
a video scaler connected to the de-interlacing unit; and  
a video digital-to-analog converter (DAC) connected to the video  
scaler and to the second video output connection.

15. A method for processing A/V content in an A/V device comprising the steps of:

5 providing an A/V channel;  
receiving an A/V signal from the A/V channel;  
capturing a portion of the A/V signal, wherein the portion of the A/V  
signal comprises a CC portion, an audio portion, a video still image, or a  
combination thereof; and

storing the captured portion of the A/V signal.

16. A method as defined in claim 15 further comprising the step of:  
scanning through a plurality of A/V channels;  
receiving the A/V signal from each of the A/V channels;  
capturing the portion of the A/V signal from each of the A/V channels;

5 and

storing the captured portion of the A/V signal from each of the A/V  
channels.

17. A method as defined in claim 16 further comprising the step of:  
searching through the captured portion of the A/V signals from each  
of the A/V channels to locate a match with user search criteria.

18. A method as defined in claim 17 wherein:

5 the user search criteria comprises textual criteria related to the CC  
portion of the A/V signal, audio criteria related to the audio portion of the A/V  
signal, video criteria related to the video still image of the A/V signal, or a  
combination thereof.

19. A method as defined in claim 18 wherein:

the video criteria comprises a match within a predetermined tolerance  
between the video still image and a predetermined image.



20. A method as defined in claim 18 further comprising the step of:  
indicating a change in the A/V content of a selected A/V channel upon  
a match in the audio criteria for the selected A/V channel.

21. A method as defined in claim 18 further comprising the step of:  
capturing and indexing the CC portion of the A/V signal according to  
save criteria, wherein the save criteria comprises frequency of save of the CC  
portion, frequency of search match, storing a predetermined number of minutes of  
5 CC content before and/or after the match location, time-based order of matched  
textual criteria, or a combination thereof.

22. A method as defined in claim 17 further comprising the step of:  
responding according to response instructions upon the location of a  
match in a selected A/V channel.

23. A method as defined in claim 22 wherein:  
the responding step comprises the further steps of:  
providing a visible alert signal;  
providing an audible alert signal;  
5 displaying, according to an A/V display format, the A/V content  
from the selected A/V channel in which the match was located;  
displaying, according to a CC display format, text of the CC  
portion of the A/V signal from the selected A/V channel in which the match was located;  
capturing the video still image of the A/V signal from the  
10 selected A/V channel in which the match was located;  
recording the A/V content of the selected A/V channel in which  
the match was located;  
recording the text of the CC portion of the A/V signal of the  
selected A/V channel in which the match was located; or  
15 a combination thereof.

24. A method as defined in claim 23 further comprising the step of:  
setting one or more priorities for the response instructions, the search

criteria, the A/V and/or CC display format, the A/V and/or CC recording, the text of the CC portion, or a combination thereof.

25. A method as defined in claim 24 further comprising the step of:  
forming the A/V and/or CC display format based on the CC content  
and the search match, the display format including options to display per selected  
A/V channel, to display per predetermined format on selected A/V channel, to  
5 queue the priorities, or to display the captured video still image.

26. A method as defined in claim 16, wherein the captured portion of the  
A/V signal for each A/V channel comprises CC content, further comprising the step  
of:

displaying the CC content of at least one A/V channel for viewing.

27. A method as defined in claim 26 further comprising the step of:  
displaying the CC content of more than one A/V channel for  
simultaneous viewing.

28. A method as defined in claim 26 further comprising the steps of:  
receiving the CC content at a first rate; and  
displaying the CC content at a second rate different from the first rate.

29. A method as defined in claim 15 further comprising the step of:  
providing one or more A/V channels comprising a DVD source, a  
broadcast programming source, and a web programming site.

30. A method as defined in claim 29 further comprising the steps of:  
receiving DVD content from the DVD source;  
receiving broadcast programming from the broadcast programming  
source;  
5 receiving web programming from the web programming site;  
or a combination thereof.

31. A method as defined in claim 30, wherein the DVD content includes  
subtitle content which is played back at a first rate simultaneously with playback of  
the A/V content, further comprising the steps of:

capturing the subtitle content at a second rate that is faster than the

5 first rate;

indexing the captured subtitle content; and  
searching for matches within the indexed subtitle content.

32. A method as defined in claim 30 further comprising the step of:  
searching the captured portion of the A/V signal of at least one  
broadcast programming source and at least one DVD source simultaneously.

33. A method as defined in claim 30 wherein the web programming  
includes a live A/V broadcast with CC content.

34. A method as defined in claim 30, wherein the broadcast programming  
includes the CC portion, further comprising the step of:

enabling karaoke features for the CC portion of the broadcast  
programming.

35. A method as defined in claim 15 further comprising the steps of:  
selecting video encoding circuitry from between a PAL/NTSC video  
encoder and a progressive monitor video encoding circuitry; and  
displaying the A/V signal through the selected video encoding

5 circuitry.

36. A method as defined in claim 35 wherein:  
upon selection of the progressive monitor video encoding circuitry,  
the displaying step further comprises the steps of:

5 de-interlacing the A/V signal;  
scaling the de-interlaced A/V signal; and  
converting the de-interlaced A/V signal from a digital signal to  
an analog signal.

37. A digital versatile disk (DVD) player for playing back DVD content on  
a display comprising:

5 a video encoding circuit comprising a digital video input, a video  
signal converter and a display signal output, the digital video input receiving a  
digital video signal, the video signal converter converting the digital video signal  
into a display signal, and the display signal output providing the display signal to

the display;

a source of compressed DVD content;

a DVD decoder comprising a DVD input connected to the DVD

10 content source and a DVD output connected to the digital video input of the video encoding circuit, the DVD input receiving the compressed DVD content, and the DVD output providing decoded DVD content decoded from the compressed DVD content; and

15 a broadcast television (TV) tuner comprising a broadcast input and a program output, the broadcast input receiving multiple broadcast TV programs, and the program output connected to the digital video input of the video encoding circuit and providing a selected one of the multiple broadcast TV programs to the video encoding circuit;

20 and wherein the video encoding circuit converts either the selected TV program or the decoded DVD content into the display signal.

38. A DVD player as defined in claim 37 further comprising:

5 a second broadcast TV tuner comprising a broadcast input and a program output, the broadcast input receiving the multiple broadcast TV programs, and the program output connected to the digital video input of the video encoding circuit and providing a second selected one of the multiple broadcast TV programs to the video encoding circuit;

and wherein the video encoding circuit converts the selected TV program first aforesaid, the second selected TV program or the decoded DVD content into the display signal.

39. A digital versatile disk (DVD) player for playing back a digital video signal on a conventional television or progressive monitor comprising:

a source of the digital video signal, the digital video signal being interlaced and having a source resolution; and

5 a video encoding circuit comprising a digital video input, a video encoder, a de-interlacing unit, a video scaler, a video digital-to-analog converter (DAC) and a display signal output, the digital video input connected to the video

encoder and the de-interlacing unit, the de-interlacing unit connected to the video  
scaler, the video scaler connected to the video DAC, and the video DAC connected  
10 to the display signal output;

and wherein:

the digital video input receives the digital video signal and  
provides the digital video signal to a selected one of either the video encoder or the  
de-interlacing unit;

15 the video encoder encodes the digital video signal into a  
conventional television signal having a first display resolution and provides the  
conventional television signal to the conventional television; and

the de-interlacing unit de-interlaces the digital video signal into  
a progressive video signal, the video scaler scales the progressive video signal  
20 into a scaled video signal having a second display resolution, the video DAC  
converts the scaled video signal into a display signal, and the display signal output  
provides the display signal to the progressive monitor.

40. A DVD player as defined in claim 39 wherein:

the first display resolution is equal to or less than the source  
resolution; and

5 the second display resolution is equal to or greater than the source  
resolution.

41. A DVD player as defined in claim 39 wherein the source of the digital  
video signal comprises a DVD source and a conventional broadcast television  
source.

42. A digital versatile disk (DVD) player for playing back an audio/visual  
(A/V) signal comprising:

a source of the A/V signal, the A/V signal comprising close caption  
(CC) content, audio content and video content;

5 at least one content capture unit coupled to the source of the A/V  
signal, the content capture unit receiving at least a portion of the A/V signal and  
capturing part of the A/V signal, and each content capture unit comprising:

- 10                   a CC data slicer;  
                  an audio capture unit;  
                  a video still image capture unit; or  
                  a combination thereof; and

15                   a captured content storage unit coupled to the content capture unit  
and comprising memory storage space, the memory storage space receiving the  
captured part of the A/V signal from the content capture unit and storing the  
captured part of the A/V signal.

43.    A DVD player as defined in claim 42 wherein the source of the A/V  
signal comprises a DVD source and a conventional broadcast television source.

44.    A DVD player as defined in claim 43 wherein the source of the A/V  
signal further comprises a World Wide Web A/V source.

45.    A programmable storage device readable by a machine tangibly  
embodying a program of instructions executable by the machine to perform method  
steps for processing A/V content in an A/V device, the method steps comprising:

- 5                   providing an A/V channel;  
                  receiving an A/V signal from the A/V channel;  
                  capturing a portion of the A/V signal, wherein the portion of the A/V  
signal comprises a CC portion, an audio portion, a video still image, or a  
combination thereof; and  
                  storing the captured portion of the A/V signal.

46.    A programmable storage device as defined in claim 45, wherein the  
method steps further comprise:

- 5                   scanning through a plurality of A/V channels;  
                  receiving the A/V signal from each of the A/V channels;  
                  capturing the portion of the A/V signal from each of the A/V channels; and  
                  storing the captured portion of the A/V signal from each of the A/V  
channels.

47.    A programmable storage device as defined in claim 46, wherein the  
method steps further comprise:

searching through the captured portion of the A/V signals from each of the A/V channels to locate a match with user search criteria.

48. A programmable storage device as defined in claim 47, wherein the method steps further comprise:

the user search criteria comprises textual criteria related to the CC portion of the A/V signal, audio criteria related to the audio portion of the A/V signal, video criteria related to the video still image of the A/V signal, or a combination thereof.

49. A programmable storage device as defined in claim 46, wherein the captured portion of the A/V signal for each A/V channel comprises CC content and the method steps further comprise:

displaying the CC content of each A/V channel for viewing.

50. A programmable storage device as defined in claim 45, wherein the method steps further comprise:

providing one or more A/V channels comprising a DVD source, a broadcast programming source, and a web programming site.

# AUDIO/VISUAL DEVICE FOR CAPTURING, SEARCHING AND/OR DISPLAYING AUDIO/VISUAL MATERIAL

## Abstract of the Disclosure

An audio/visual (A/V) device, such as a DVD player, assists a user in finding desired programming from among DVD programs, conventional broadcast television (TV) programs and World Wide Web transmitted programs. The programs contain close caption (CC) and A/V content. The A/V device captures and stores the CC and/or A/V content either for current or later manual use by the user or concurrent automatic searching for desired program content or information. Text-based searching is performed on the CC content for a match with user-specified textual search criteria. The audio content is searched for either a change that indicates a change in programming or a match with user-specified audio search criteria. A video still image is captured from the video content for manual viewing or automatic comparison to a desired image. The A/V device also presents the information, including the A/V content, captured CC content and search results, on either a conventional TV or higher resolution progressive monitor.



Variable	Mean	SD	Min	Max
Age	35.2	12.5	18	65
Gender	Male	10.5	0	20
Marital status	Married	15.2	0	20
Education	High school	12.5	0	20
Occupation	Unemployed	10.5	0	20
Income	Low	10.5	0	20
Health status	Good	10.5	0	20
Smoking status	Non-smoker	10.5	0	20
Alcohol consumption	Non-drinker	10.5	0	20
Exercise frequency	Low	10.5	0	20
Stress level	Low	10.5	0	20
Sleep quality	Good	10.5	0	20
Appetite	Good	10.5	0	20
Weight change	Stable	10.5	0	20
Blood pressure	Normal	10.5	0	20
Blood sugar	Normal	10.5	0	20
Cholesterol	Normal	10.5	0	20
Triglycerides	Normal	10.5	0	20
Hemoglobin A1c	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	20
White blood cells	Normal	10.5	0	20
Platelets	Normal	10.5	0	20
Red blood cells	Normal	10.5	0	20
Hematocrit	Normal	10.5	0	20
Hemoglobin	Normal	10.5	0	

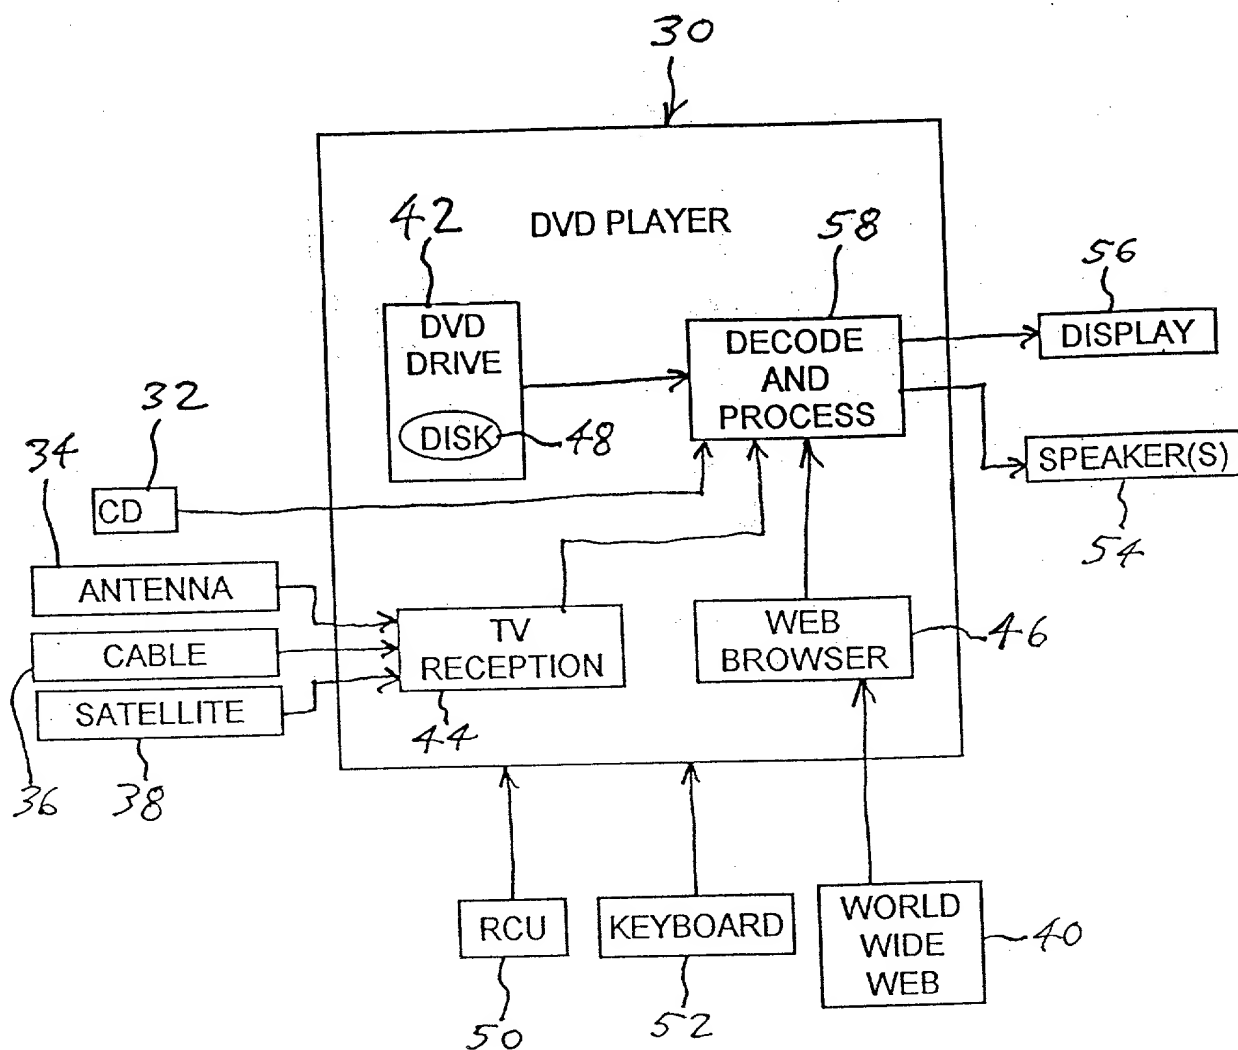


Fig. 1

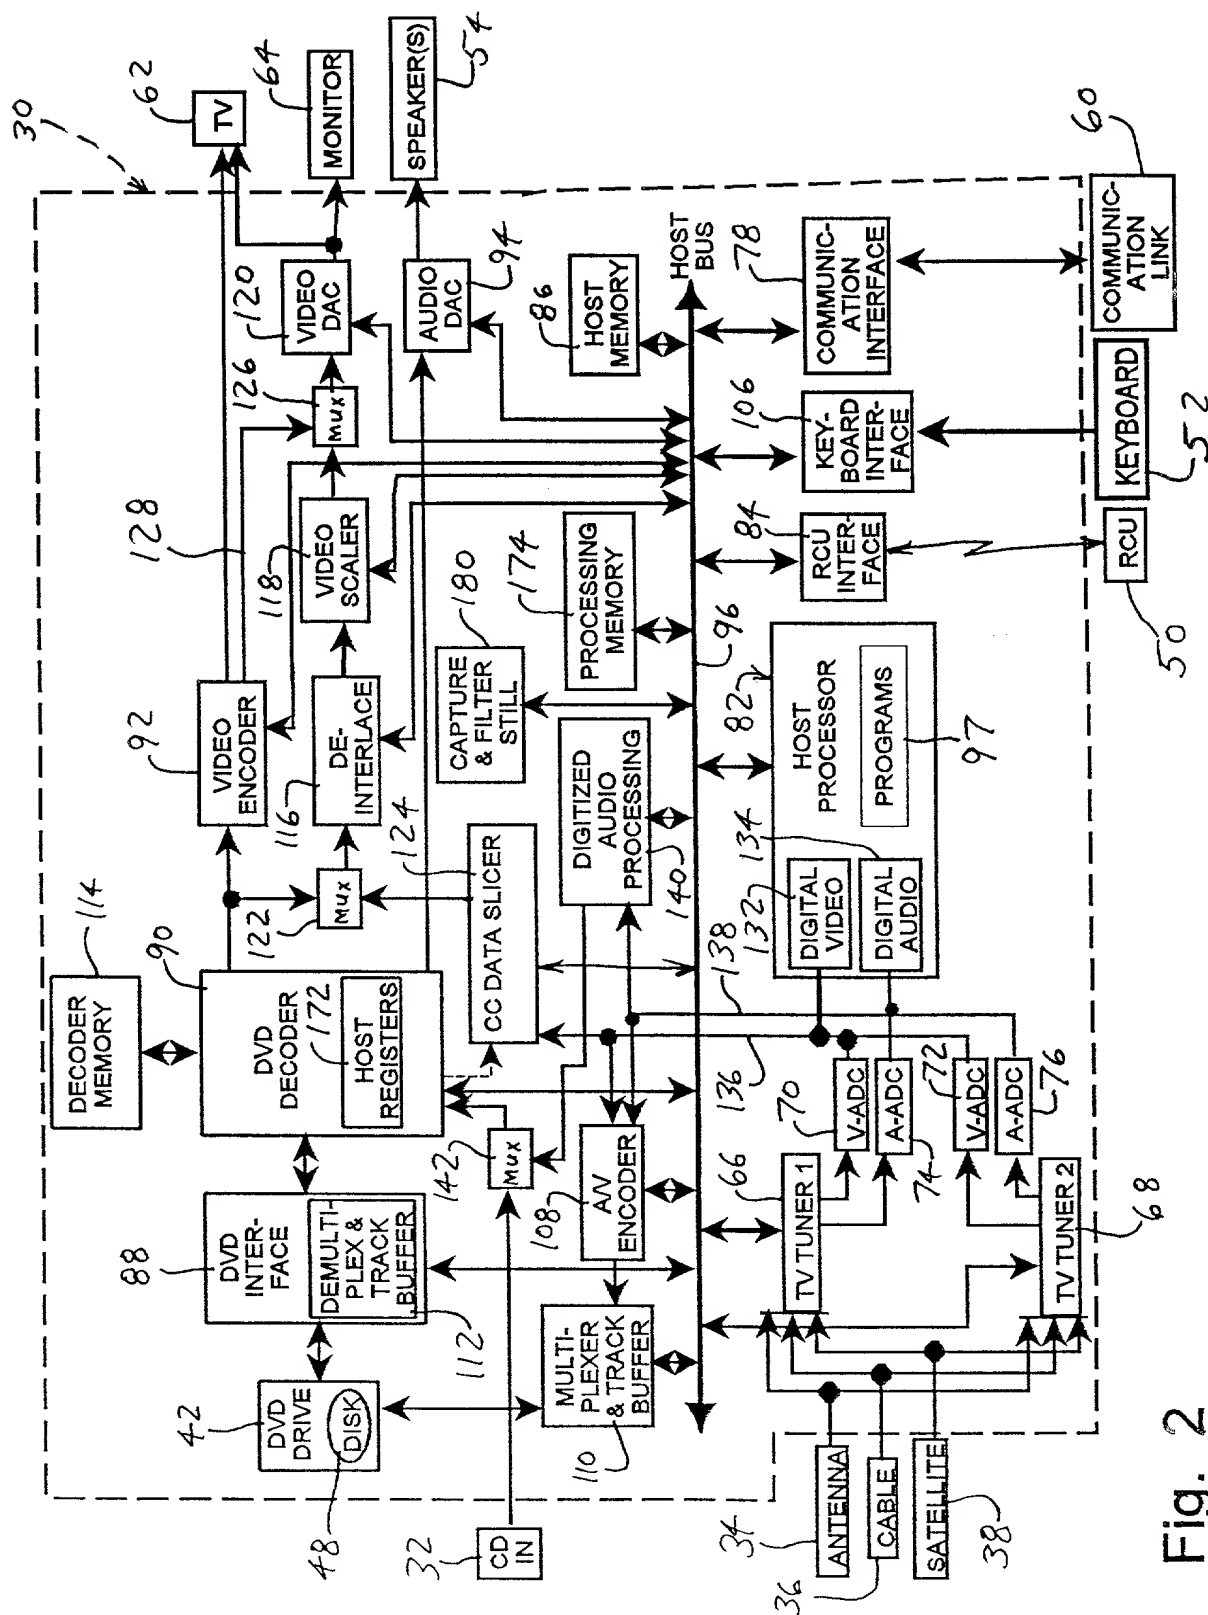


Fig. 2

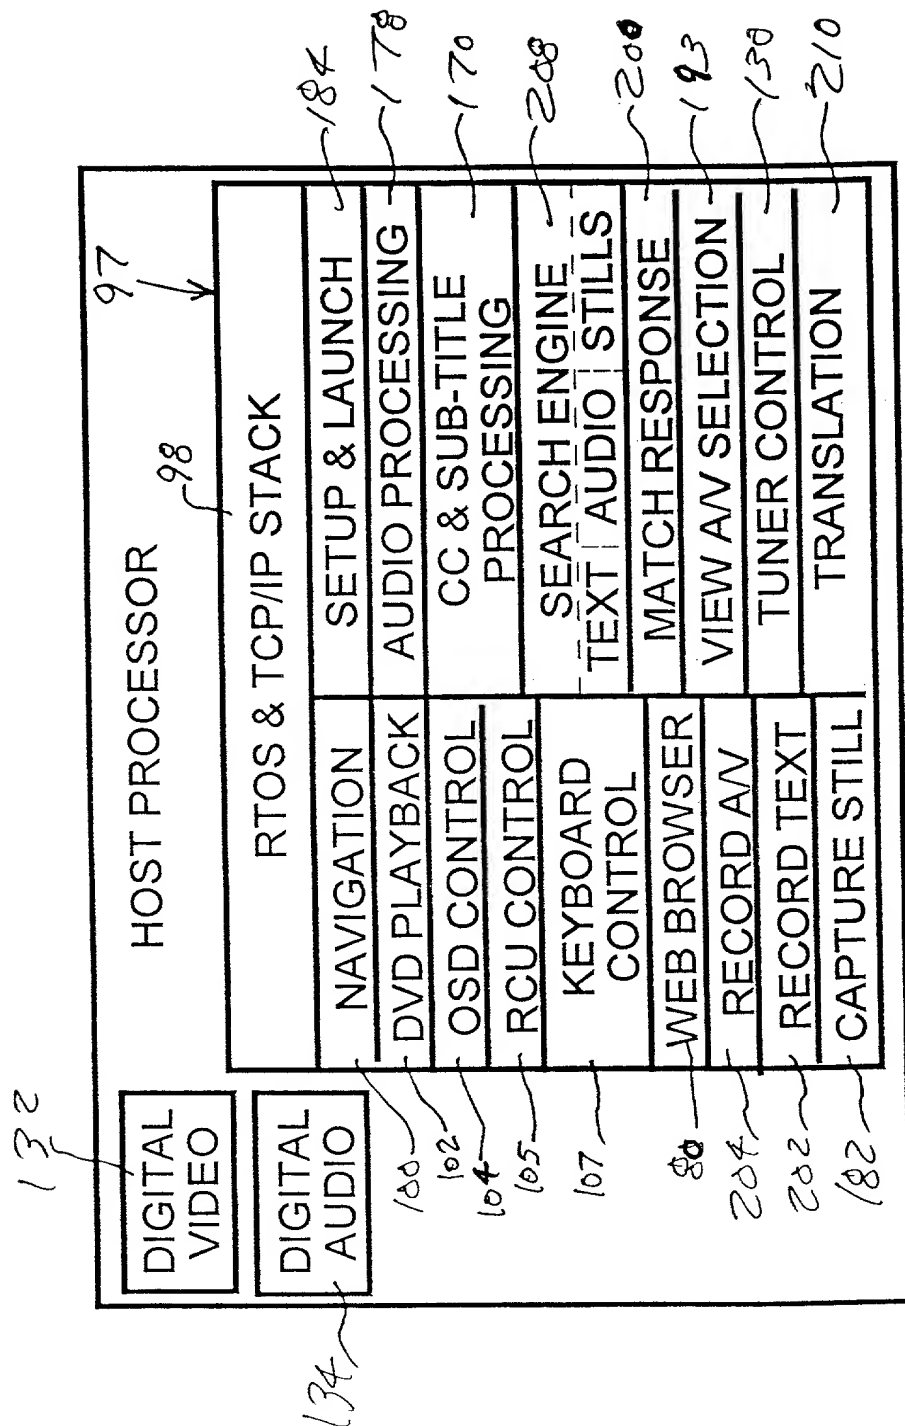


Fig. 3

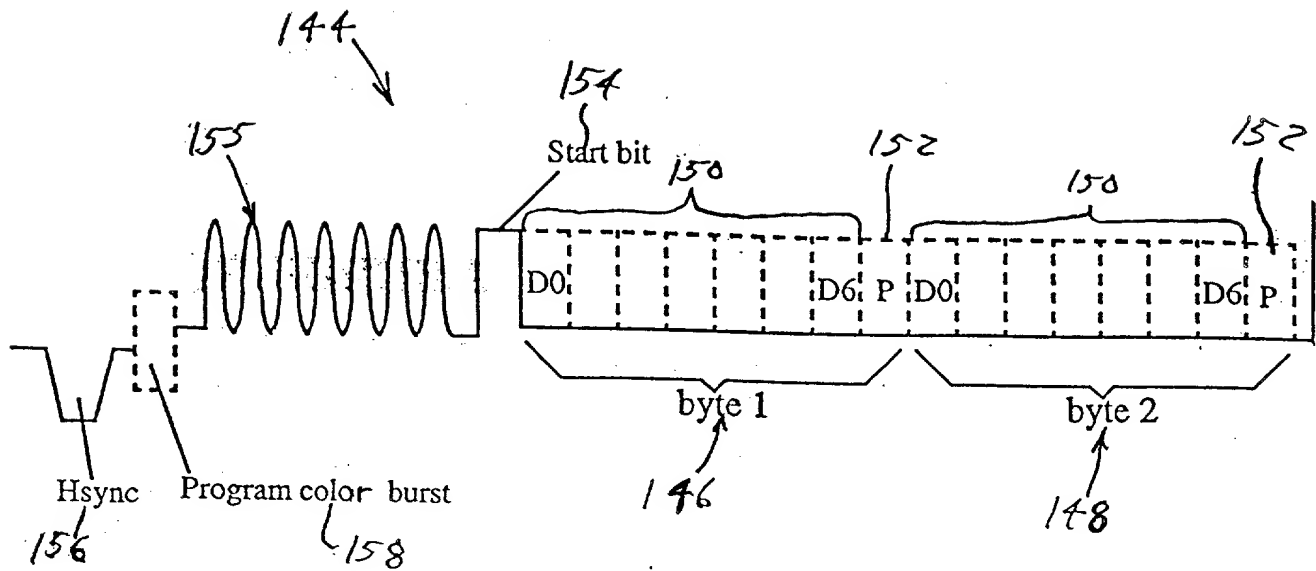


FIG. 4

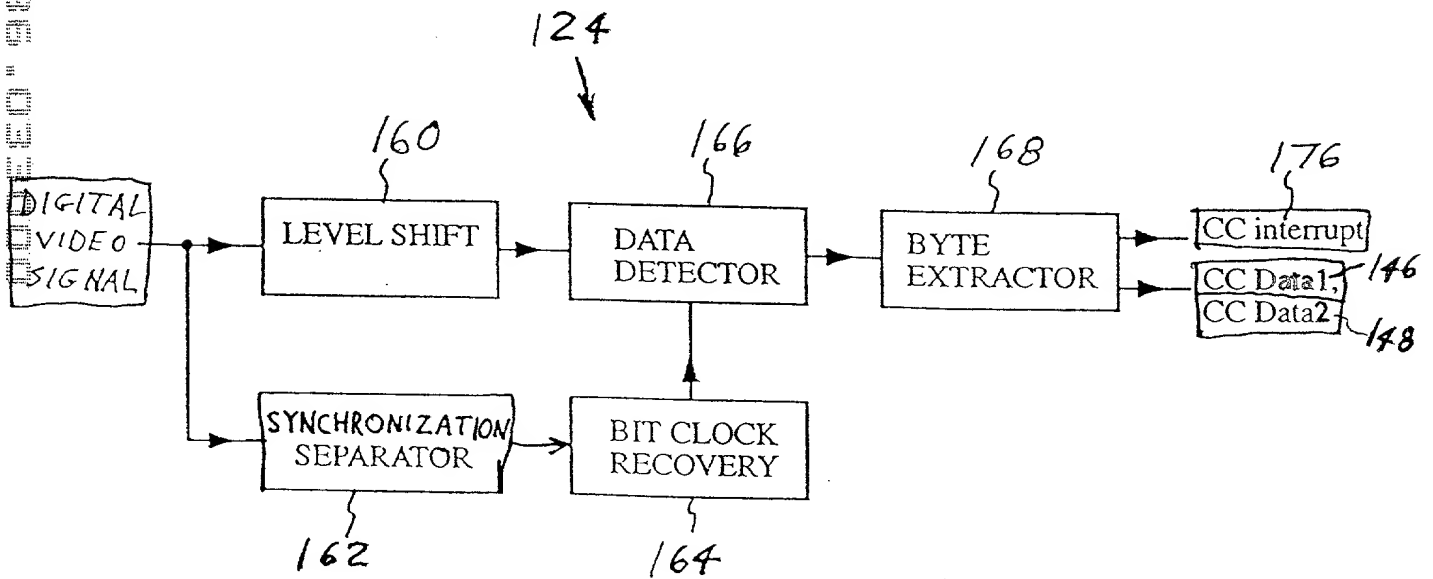


FIG. 5

Fig. 6

Variable	Mean	SD	Min	Max
Age	38.5	10.2	25	55
Gender	0.5	0.5	0	1
Marital Status	0.7	0.5	0	1
Education	12.5	1.5	10	15
Income	3500	1500	1000	7000
Health Status	0.8	0.3	0	1
Exercise Frequency	2.5	1.5	0	5
Stress Level	4.5	1.5	1	7
Sleep Quality	3.5	1.5	1	5
Dietary Habits	2.5	1.5	0	5
Work-Life Balance	3.5	1.5	1	5
Family Support	4.5	1.5	1	7
Community Involvement	2.5	1.5	0	5
Overall Well-being	4.5	1.5	1	7

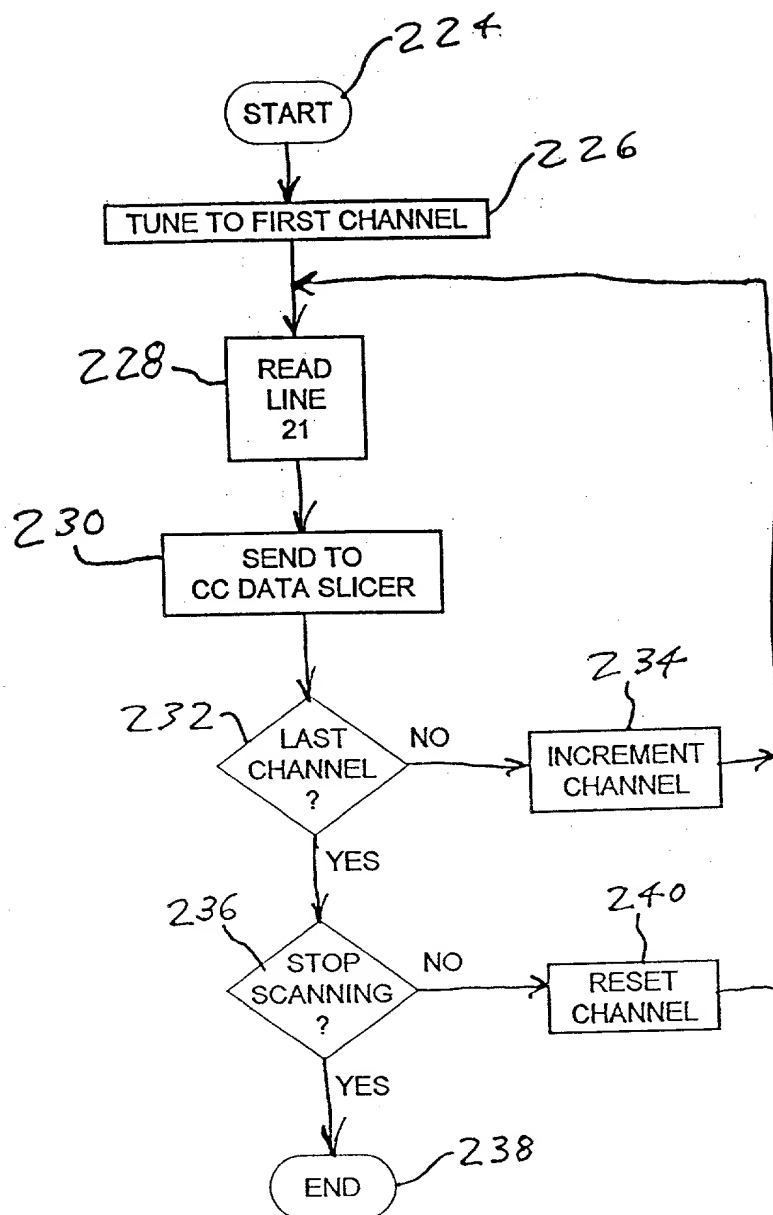


Fig. 7

Variable	Mean	Standard Deviation	Minimum	Maximum
Age	34.5	10.2	22	55
Gender	0.5	0.5	0	1
Marital Status	0.7	0.5	0	1
Education	12.5	1.5	10	15
Income	3500	1500	1000	7000
Health	0.8	0.4	0	1
Smoking	0.3	0.5	0	1
Alcohol	0.2	0.4	0	1
Exercise	0.6	0.5	0	1
Stress	0.7	0.5	0	1
Depression	0.4	0.5	0	1
Loneliness	0.5	0.5	0	1
Life Satisfaction	0.6	0.5	0	1
Quality of Life	0.7	0.5	0	1
Overall Health	0.8	0.4	0	1
Physical Health	0.9	0.3	0	1
Mental Health	0.7	0.5	0	1
Social Health	0.6	0.5	0	1
Emotional Health	0.5	0.5	0	1
Behavioral Health	0.4	0.5	0	1
Environmental Health	0.3	0.5	0	1
Occupational Health	0.2	0.5	0	1
Financial Health	0.1	0.5	0	1
Family Health	0.0	0.5	0	1
Community Health	0.0	0.5	0	1
National Health	0.0	0.5	0	1
Global Health	0.0	0.5	0	1
World Health	0.0	0.5	0	1
Universal Health	0.0	0.5	0	1
Human Health	0.0	0.5	0	1
Planetary Health	0.0	0.5	0	1
Cosmic Health	0.0	0.5	0	1
Divine Health	0.0	0.5	0	1
Spiritual Health	0.0	0.5	0	1
Religious Health	0.0	0.5	0	1
Cultural Health	0.0	0.5	0	1
Social Health	0.0	0.5	0	1
Political Health	0.0	0.5	0	1
Economic Health	0.0	0.5	0	1
Environmental Health	0.0	0.5	0	1
Occupational Health	0.0	0.5	0	1
Financial Health	0.0	0.5	0	1
Family Health	0.0	0.5	0	1
Community Health	0.0	0.5	0	1
National Health	0.0	0.5	0	1
Global Health	0.0	0.5	0	1
World Health	0.0	0.5	0	1
Universal Health	0.0	0.5	0	1
Human Health	0.0	0.5	0	1
Planetary Health	0.0	0.5	0	1
Cosmic Health	0.0	0.5	0	1
Divine Health	0.0	0.5	0	1
Spiritual Health	0.0	0.5	0	1
Religious Health	0.0	0.5	0	1
Cultural Health	0.0	0.5	0	1
Social Health	0.0	0.5	0	1
Political Health	0.0	0.5	0	1
Economic Health	0.0	0.5	0	1
Environmental Health	0.0	0.5	0	1
Occupational Health	0.0	0.5	0	1
Financial Health	0.0	0.5	0	1
Family Health	0.0	0.5	0	1
Community Health	0.0	0.5	0	1
National Health	0.0	0.5	0	1
Global Health	0.0	0.5	0	1
World Health	0.0	0.5	0	1
Universal Health	0.0	0.5	0	1
Human Health	0.0	0.5	0	1
Planetary Health	0.0	0.5	0	1
Cosmic Health	0.0	0.5	0	1
Divine Health	0.0	0.5	0	1
Spiritual Health	0.0	0.5	0	1
Religious Health	0.0	0.5	0	1
Cultural Health	0.0	0.5	0	1
Social Health	0.0	0.5	0	1
Political Health	0.0	0.5	0	1
Economic Health	0.0	0.5	0	1
Environmental Health	0.0	0.5	0	1
Occupational Health	0.0	0.5	0	1
Financial Health	0.0	0.5	0	1
Family Health	0.0	0.5	0	1
Community Health	0.0	0.5	0	1
National Health	0.0	0.5	0	1
Global Health	0.0	0.5	0	1
World Health	0.0	0.5	0	1
Universal Health				

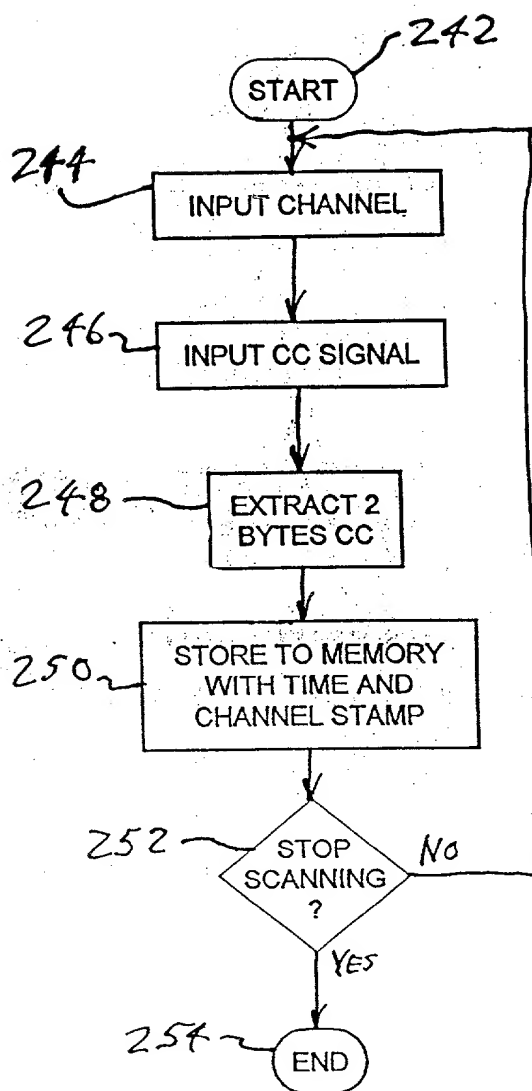


FIG. 8

272



**COMBINED DECLARATION AND POWER  
OF ATTORNEY FOR PATENT APPLICATION**

As the below-named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor of the subject matter which is claimed and for which a patent is sought on the invention entitled AUDIO/VISUAL DEVICE FOR CAPTURING, SEARCHING AND/OR DISPLAYING AUDIO/VISUAL MATERIAL, the specification of which is attached hereto, and which is assigned Attorney Docket No. 99-245 by my below-named attorneys.

The person named as inventor is: Daniel Watkins.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims.

I acknowledge the duty to disclose information which is material to patentability as defined in CFR 37 § 1.56.

No priority claim is made under 35 U.S.C. § 119 or 35 U.S.C. § 120.

Power of Attorney: As the named inventor, I hereby appoint David G. Pursel, Registration No. 28,659; Ralph R. Veseli, Registration No. 33,807; Bruce R. Hopenfeld, Registration No. 39,714; Sandeep Jaggi, Registration No. 43,331; John R. Ley, Registration No. 27,453; L. Jon Lindsay, Registration No. 36,855; and Steven J. Spellman, Registration No. 45,124, to prosecute this application and transact all business in the Patent and Trademark Office connected therewith.

Send all correspondence to: Sandeep Jaggi, Esq., Intellectual Property Law Department, LSI Logic Corporation, M/S D-106, 1551 McCarthy Boulevard, Milpitas, CA 95035, and direct telephone calls to Sandeep Jaggi at (408) 954-4923.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true, and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of inventor: Daniel Watkins

Post Office Address: \_\_\_\_\_

Residence Address: 13641 Vaquero Court  
Saratoga, CA 95070

Inventor's Signature David Watkins

Date: 3-29-00 Citizenship: United States

[illegible]